

Dielectric Unions

- Rated to 250 psi
- 180° Max working temperature
- Threaded end complies with ANSI B1.20.1
- Solder end complies with ANSI B16.22
- Lead Free




ITEM #	DESCRIPTION	INNER CASE QTY	MASTER CASE QTY
DU5FSLF	1/2" FIP X 1/2" SWEAT	12	24
DU7FSLF	3/4" FIP X 3/4" SWEAT	12	24
DU1FSLF	1" FIP X 1" SWEAT	10	20
DU125FSLF	1-1/4" FIP X 1-1/4" SWEAT	6	12
DU15FSLF	1-1/2" FIP X 1-1/2" SWEAT	6	12
DU2FSLF	2" FIP X 2" SWEAT	2	4




Galvanized Steel
UNS G10180



EPDM Rubber




Brass



PSU 3010



Galvanized Steel
UNS G10180

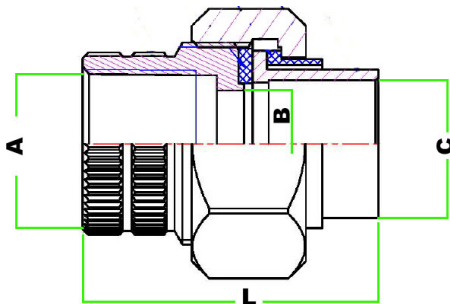

ITEM #	A	B	C	L
DU5FSLF	1/2" NPT	.54	1/2" SWT	1.84
DU7FSLF	3/4" NPT	.74	3/4" SWT	2.03
DU1FSLF	1" NPT	.97	1" SWT	2.34
DU125FSLF	1-1/4" NPT	1.22	1-1/4" SWT	2.65
DU15FSLF	1-1/2" NPT	1.47	1-1/2" SWT	2.80
DU2FSLF	2" NPT	1.86	2" SWT	3.10

*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$ per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 and other equivalent state regulations.

HYDRAPRO INC.

Phone: 877-813-2333; Fax 877-249-8435

Atlanta - Boston - Dallas - Deerfield Beach - Houston - Philadelphia

www.hydrapro.biz