


## LAVATORY SUPPLY CONNECTORS



| Part #  | Model # | Description (Size)                     | Inner Carton Qty | Master Carton Qty | Select Model Below       |
|---|---------|--|------------------|-------------------|--------------------------|
| <b>LAVATORY SUPPLY LINE 1/2" FIP x 3/8" COMP.</b> |         |  |                  |                   |                          |
| -   | M1F9    | 9" LAVATORY SUPPLY LINE (FIP x COMP.)  | 25               | 100               | <input type="checkbox"/> |
| H28031  | M1F12   | 12" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28033  | M1F16   | 16" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28034  | M1F20   | 20" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28036  | M1F24   | 24" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28037  | M1F30   | 30" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28038  | M1F36   | 36" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |



| NO. | PART    | MATERIAL                                |
|-----|---------|---|
| 1   | Barb    | C46500 Brass                            |
| 2   | Washer  | EPDM                                    |
| 3   | Nut     | Brass                                   |
| 4   | Ferrule | 304 Stainless Steel                     |
| 5   | Hose    | 304 Stainless Steel over Reinforced PVC |
| 6   | Washer  | EPDM                                    |
| 7   | Nut     | Brass                                   |

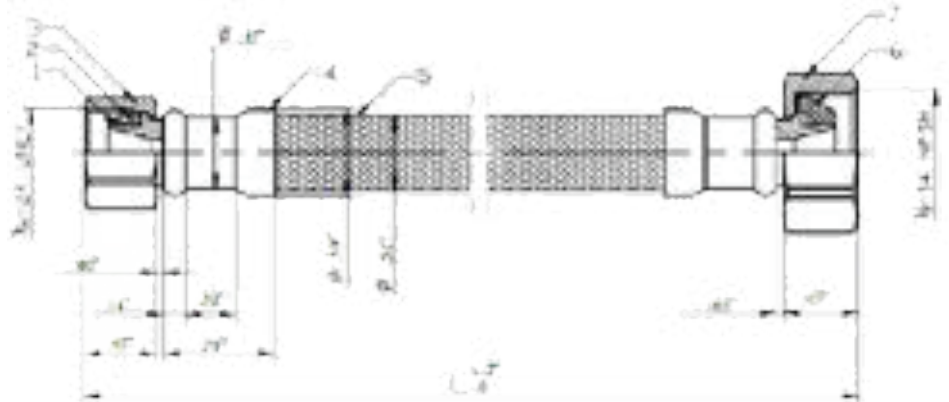

## FEATURES & BENEFITS

- PVC Reinforced Inner Core Hose
- Braided Type 304 Stainless Steel
- Stainless Steel Ferrule
- Chrome Plated Brass Nut
- Lead-Free Brass Insert
- Individually Labeled and Barcoded
- Max Working Pressure is 125 PSI at 160°
- Max Burst Pressure is 1500 PSI at 160°

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:


PART NUMBER:

## LAVATORY SUPPLY CONNECTORS

| Part #                                   | Model # | Description (Size)                     | Inner Carton Qty | Master Carton Qty | Select Model Below       |
|--|---------|--|------------------|-------------------|--------------------------|
| LAVATORY SUPPLY LINE 1/2" FIP x 1/2" FIP |         |  |                  |                   |                          |
| H28041                                   | M3F12   | 12" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28040                                   | M3F20   | 20" LAVATORY SUPPLY LINE (FIP x COMP.) | 25               | 100               | <input type="checkbox"/> |



| NO. | PART    | MATERIAL                                |
|-----|---------|---|
| 1   | Barb    | C46500 Brass                            |
| 2   | Washer  | EPDM                                    |
| 3   | Nut     | Brass                                   |
| 4   | Ferrule | 304 Stainless Steel                     |
| 5   | Hose    | 304 Stainless Steel over Reinforced PVC |
| 6   | Washer  | EPDM                                    |
| 7   | Nut     | Brass                                   |

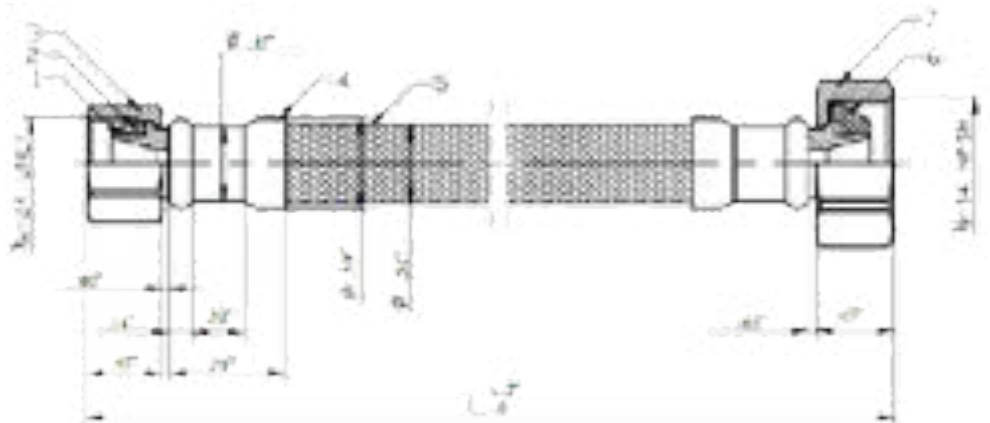

## FEATURES & BENEFITS

- PVC Reinforced Inner Core Hose
- Braided Type 304 Stainless Steel
- Stainless Steel Ferrule
- Chrome Plated Brass Nut
- Lead-Free Brass Insert
- Individually Labeled and Barcoded
- Max Working Pressure is 125 PSI at 160°
- Max Burst Pressure is 1500 PSI at 180°

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:

PART NUMBER:

## TOILET SUPPLY CONNECTORS




| Part #  | Model # | Description (Size)                        | Inner Carton Qty | Master Carton Qty | Select Model Below       |
|---|---------|---|------------------|-------------------|--------------------------|
| <b>CLOSET SUPPLY LINE 7/8" BALLCOCK x 3/8" COMP</b> |         |   |                  |                   |                          |
| H28048  | MIT9    | 9" CLOSET SUPPLY LINE (BALLCOCK x COMP.)  | 25               | 100               | <input type="checkbox"/> |
| H28045  | MIT12   | 12" CLOSET SUPPLY LINE (BALLCOCK x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28046  | MIT16   | 16" CLOSET SUPPLY LINE (BALLCOCK x COMP.) | 25               | 100               | <input type="checkbox"/> |
| H28047  | MIT20   | 20" CLOSET SUPPLY LINE (BALLCOCK x COMP.) | 25               | 100               | <input type="checkbox"/> |

### TECHNICAL DRAWINGS



| NO. | PART    | MATERIAL                                |
|-----|---------|---|
| 1   | Barb    | C46500 Brass                            |
| 2   | Washer  | EPDM                                    |
| 3   | Nut     | Brass                                   |
| 4   | Ferrule | 304 Stainless Steel                     |
| 5   | Hose    | 304 Stainless Steel over Reinforced PVC |
| 6   | Washer  | EPDM                                    |
| 7   | Nut     | Brass                                   |

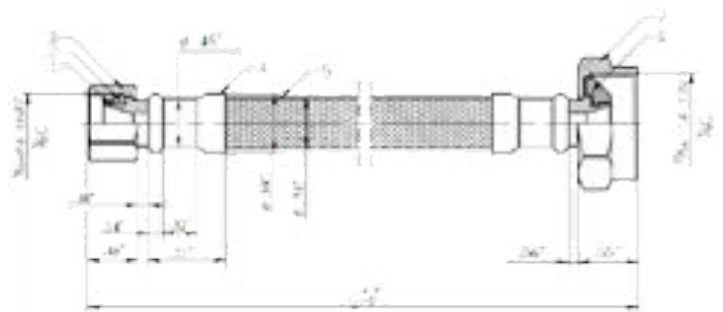

### FEATURES & BENEFITS

- PVC Reinforced Inner Core Hose
- Braided Type 304 Stainless Steel
- Stainless Steel Ferrule
- Chrome Plated Brass Wing Nut
- Lead-Free\* Brass Insert
- Individually Labeled and Barcoded
- Max Working Pressure is 125 PSI at 160°
- Max Burst Pressure is 1500 PSI at 160°

\*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content  $\leq 0.25\%$  per the Safe Drinking Water Act (Sec. 1417) ammended 1-4-2011 and other equivalent state regulations.

**JOB NAME:**

**JOB LOCATION:**

**CONTRACTOR:**

**DATE:**

**ITEM TAG:**

**ENGINEER APPROVAL:**

**DATE:**

**PART NUMBER:**

## TOILET SUPPLY CONNECTORS

| Part # | Model # | Description (Size) | Inner Carton Qty | Master Carton Qty | Select Model Below |
|--------|---------|--------------------|------------------|-------------------|--------------------|
|--------|---------|--------------------|------------------|-------------------|--------------------|


### CLOSET SUPPLY LINE 7/8" BALLCOCK x 1/2" FIP

|        |       |   |    |     |                          |
|--------|-------|---|----|-----|--------------------------|
| H28042 | M3T12 | 12" CLOSET SUPPLY LINE (BALLCOCK x FIP) | 25 | 100 | <input type="checkbox"/> |
|--------|-------|---|----|-----|--------------------------|

### TECHNICAL DRAWINGS



| NO. | PART    | MATERIAL                                |
|-----|---------|---|
| 1   | Barb    | C46500 Brass                            |
| 2   | Washer  | EPDM                                    |
| 3   | Nut     | Brass                                   |
| 4   | Ferrule | 304 Stainless Steel                     |
| 5   | Hose    | 304 Stainless Steel over Reinforced PVC |
| 6   | Washer  | EPDM                                    |
| 7   | Nut     | Brass                                   |

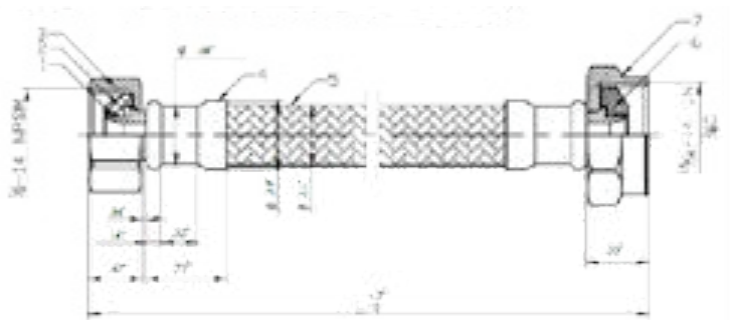

## FEATURES & BENEFITS

- PVC Reinforced Inner Core Hose
- Braided Type 304 Stainless Steel
- Stainless Steel Ferrule
- Chrome Plated Brass Wing Nut
- Lead-Free\* Brass Insert
- Individually Labeled and Barcoded
- Max Working Pressure is 125 PSI at 160°
- Max Burst Pressure is 1500 PSI at 160°

\*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content  $\leq 0.25\%$  per the Safe Drinking Water Act (Sec. 1417) ammended 1-4-2011 and other equivalent state regulations.

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:

PART NUMBER: