

STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS




PART #	MODEL #	DESCRIPTION	INNER CARTON QTY	MASTER CARTON QTY	SELECT MODEL BELOW
STAINLESS STEEL CORRUGATED (FIP x FIP) Individually tagged & barcoded					
H44020	HPSSWHCFIP12	3/4" FIP x 3/4" FIP 12"	1	25	☐
H44021	HPSSWHCFIP18	3/4" FIP x 3/4" FIP 18"	1	25	☐
H44022	HPSSWHCFIP24	3/4" FIP x 3/4" FIP 24"	1	25	☐
EPOXY COATED RED & BLUE PAIR (FIP x FIP) Bagged, paired & barcoded					
H44023	HPSSWHCFIP18PR	3/4" FIP x 3/4" FIP 18" RED/BLUE PAIR	1	12	☐
H44024	HPSSWHCFIP24PR	3/4" FIP x 3/4" FIP 24" RED/BLUE PAIR	1	12	☐

PRODUCT DETAILS

- Stainless Steel Corrugated Tubing
- Nickel Plated Brass Nuts
- Nitrile Rubber Washer
- 3/4" FIP x 3/4" FIP
- Lengths: 12", 18" & 24"
- Red/Blue Pairs: 18" & 24"
- Lead-Free*
- Conforms to ASME A112.18.6
- Conforms to CSA B125.6

DIMENSIONS

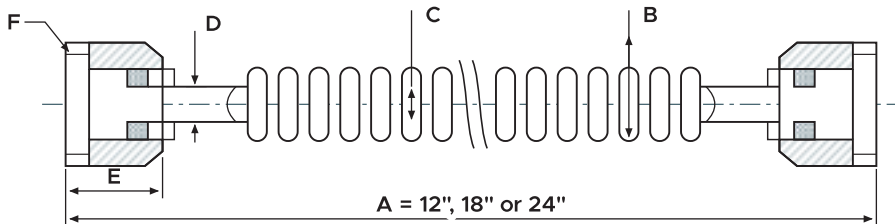

DIMENSIONS (ALL LENGTHS)

B	Corrugation O.D.	0.984"
C	Tube I.D.	0.748"
D	Wall Thickness	0.011"
E	Nut Length	0.77"
F	Thread Size [FIP]	0.75" (3/4")

*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$ per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 and other equivalent state regulations.



Listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.



Lead-Free compliant. Conforms to ASME A112.18.6 / CSA B125.6 for flexible water connectors.

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ENGINEER APPROVAL:

DATE:

ITEM TAG:

PART NUMBER: