

SHIELDED FLEXIBLE COUPLINGS




Part #	Model #	Description (Size)	SS CLAMPS	Inner Carton Qty	Master Carton Qty	Select Model Below
SHIELDED FLEXIBLE COUPLINGS						
H99945	HPSFRC12	1-1/2" SHIELDED FLEXIBLE COUPLING	3	1	50	<input type="checkbox"/>
H99946	HPSFRC2	2" SHIELDED FLEXIBLE COUPLING	3	1	50	<input type="checkbox"/>
H99947	HPSFRC3	3" SHIELDED FLEXIBLE COUPLING	4	1	50	<input type="checkbox"/>
H99948	HPSFRC4	4" SHIELDED FLEXIBLE COUPLING	4	1	30	<input type="checkbox"/>
H99949	HPSFRC6	6" SHIELDED FLEXIBLE COUPLING	4	1	30	<input type="checkbox"/>

FEATURES & MATERIALS

- Flexible Elastomeric Transition Couplings for Underground Drainage and Sewer Piping Systems
- Meets Standard ASTM C1173
- **Max Test Pressure: 4.3 PSI**
- **Max Operating Temperature: 140° F**



Note: To tighten bands, use torque wrenches with 5/16" Hex-Head/Shoulder screw.

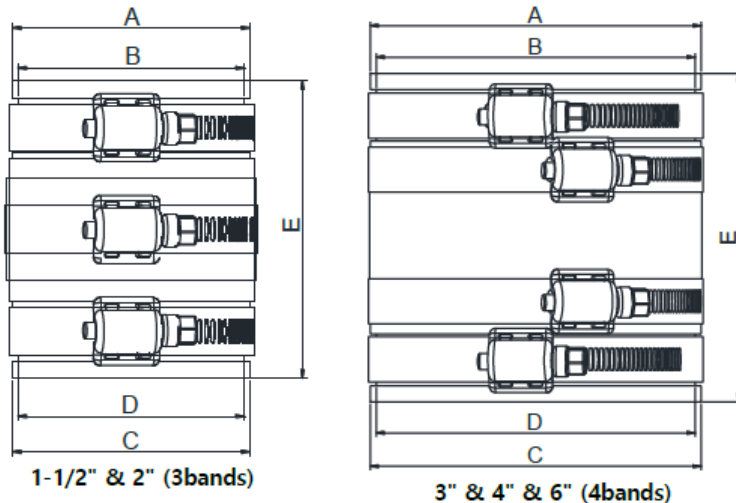

MATERIAL SPECIFICATION	
PART	MATERIAL
1 Gasket	Elastomeric
2 Band	Stainless Steel 300 Series
3 Eylet/Rivet	Stainless Steel 300 Series
4 Housing/Clamp	Stainless Steel 300 Series
5 Screw	Stainless Steel 300 Series
6 Shear Ring	Stainless Steel 300 Series

DIMENSIONS - INCHES							
Size	# of band clamps	A	B	C	D	E	instal Torque (inch-lbs)
1-1/2"	3	2.43	1.94	2.43	1.94	3.50	60
2"	3	2.90	2.41	2.90	2.41	3.50	60
3"	4	4.25	3.46	4.25	3.46	4.00	60
4"	4	5.17	4.50	5.17	4.50	4.00	60
6"	4	7.32	6.60	7.32	6.60	5.75	60

JOB NAME: _____

JOB LOCATION: _____

CONTRACTOR: _____ **DATE:** _____

ENGINEER APPROVAL: _____ **DATE:** _____

ITEM TAG: _____

PART NUMBER: _____