


PLAIN STEEL C-CLAMPS

PART #	MODEL #	DESCRIPTION	INNER CARTON QTY	MASTER CARTON QTY	SELECT MODEL BELOW
--------	---------	-------------	------------------	-------------------	--------------------

PLAIN STEEL C-CLAMPS with LOCK NUT

H32098	HMBC38B	3/8" Plain Steel C-Clamp with Lock Nut	1	100	<input type="checkbox"/>
H32099	HMBC12B	1/2" Plain Steel C-Clamp with Lock Nut	1	100	<input type="checkbox"/>

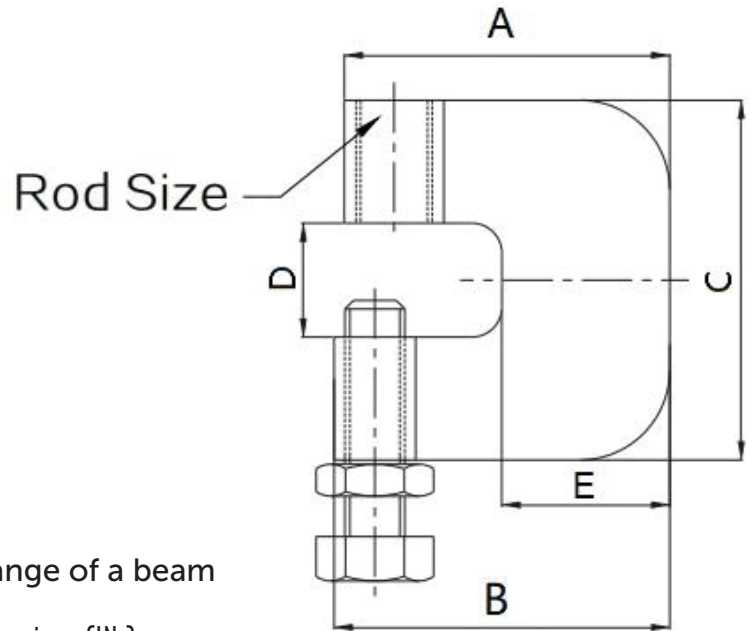

- Confirms with MSS SP-58 (Type 8) Federal Specification A-A-1192A (Type 8)
- **Finish:** Plain / EG
- **Material:** Carbon Steel
- **Approval:** UL Listed 3/8" and 1/2" (EG ONLY); FM Approved 3/8" (EG ONLY)
- **Selection & Application:** MSS SP-69
- Designed for attaching a hanger rod to the flange of a beam

C-CLAMPS | Dimensions [IN.]

Setscrew must be tightened and torque onto the sloped side of the I-Beam. Recognizing that torque wrenches are generally not used or available on many job sites, the setscrew should be tightened so it contacts the L-Beam and then an additional 1/4 to 1/2 turn added.

SEE MSS SP-69 FOR PROPER SET SCREW RECOMMENDATIONS

ROD SIZE	MAXIMUM IRON PIPE SIZE (NOMINAL PIPE SIZE) PER UL	A	B	C	D	E	DESIGN LOAD (LBS.)
3/8"	4"	2.283"	2.283"	2.311"	0.750"	1.102"	400
1/2"	4"	2.165"	2.205"	2.362"	0.750"	1.102"	400

FINISH: Plain Steel

MATERIAL: Ductile Iron

FEATURES: Complies with A-A-1192A (Type 19) and MSS SP-58 (Type 19).

JOB NAME: _____

JOB LOCATION: _____

CONTRACTOR: _____ **DATE:** _____

ENGINEER APPROVAL: _____ **DATE:** _____

ITEM TAG: _____

PART NUMBER: _____