

LEAD-FREE* WASHING MACHINE CONNECTORS



Part #	Model #	Description (Size)	Inner Carton Qty	Master Carton Qty	Select Model Below
WASHING MACHINE CONNECTOR					
H28024	M1W48	3/4" FHT x 3/4" FHT x 48" (4 Feet)	1	12	<input type="checkbox"/>
H28025	M1W60	3/4" FHT x 3/4" FHT x 60" (5 Feet)	1	12	<input type="checkbox"/>
H28026	M1W72	3/4" FHT x 3/4" FHT x 72" (6 Feet)	1	12	<input type="checkbox"/>

FEATURES & BENEFITS

* Lead-Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content $\leq 0.25\%$ per the Safe Drinking Water Act (Sec. 1417) ammended 1-4-2011 and other equivalent state regulations.




- PVC Reinforced Inner Core Hose
- 304 Stainless Steel Braiding
- Max Working Pressure is 125 PSI at 160°
- Max Burst Pressure is 1500 PSI at 160°

- Stainless Steel Ferrule
- Chrome Plated Brass Nuts
- Individully Bagged and Barcoded
- Universal Fit: Includes 3/8" Comp. x 3/8" MIP and 3/8" Comp x 3/4" FHT Elbows
- Lead-Free*

TECHNICAL DRAWINGS

NO.	MATERIAL
1	EPDM Rubber
2	LF Brass (C46500)
3	LF Brass (C46500)
4	304 Stainless Steel
5	304 SS over Re-inforced PVC

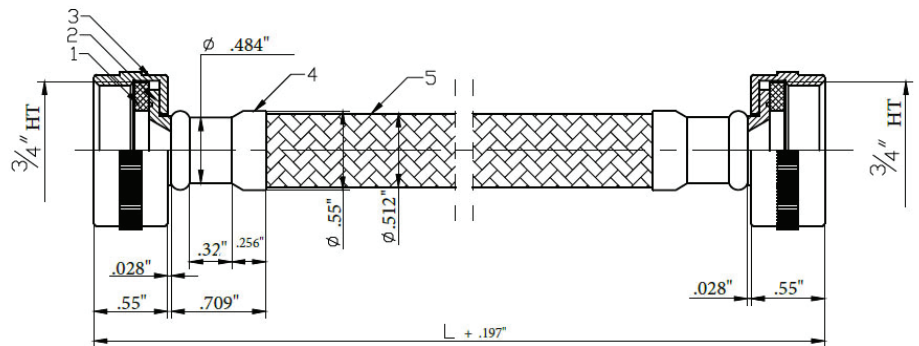

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:

PART NUMBER: