


## TRANSITION FITTINGS MALE ADAPTERS CPVC x SS



No wrench here  
Use Teflon tape

Part #	Model #	Description [Size]	Inner Carton Qty	Master Carton Qty	Select Model Below
<b>MALE ADAPTER (CPVC x STAINLESS STEEL)</b>					
H48402	STD4704ST12	1/2" CPVC X 1/2" MIP MALE ADAPTER	25	150	<input type="checkbox"/>
H48404	STD4704ST34	3/4" CPVC X 3/4" MIP MALE ADAPTER	25	100	<input type="checkbox"/>
H48306	STD4704ST1	1" CPVC X 1" MIP MALE ADAPTER	25	50	<input type="checkbox"/>
H48401	STD4704ST114	1 1/4" CPVC X 1 1/4" MIP MALE ADAPTER	1	16	<input type="checkbox"/>
H48400	STD4704ST112	1 1/2" CPVC X 1 1/2" MIP MALE ADAPTER	1	16	<input type="checkbox"/>
H48403	STD4704ST2	2" CPVC X 2" MIP MALE ADAPTER	1	8	<input type="checkbox"/>

- Lead-Free
- Max working pressure 100 PSI @ 180° F
- Manufactured to ASTM Standard D2846

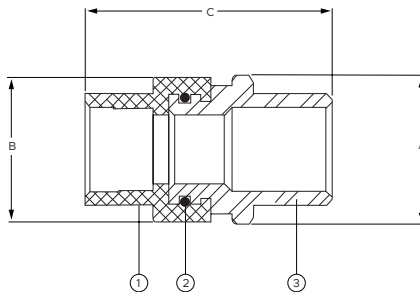

Size	A	B	C
1/2" MNPT x CPVC	0.99	1.08	1.85
3/4" MNPT x CPVC	1.24	1.27	2.17
1" MNPT x CPVC	1.50	1.55	2.50
1-1/4" MNPT x CPVC	1.88	1.87	2.87
1-1/2" MNPT x CPVC	2.15	2.13	3.19
2" MNPT x CPVC	2.65	2.61	3.90

### MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Solvent-weld socket tubing adapter	Virgin CPVC resin	ASTM D1784 Class 23447
2 O-ring	EPDM rubber	Commercial grade
3 Pipe thread adapter	Investment cast stainless steel	AISI Grade 304, CF8

### Standards:

ANSI/ASME B1.20.1. Pipe threads, general purpose, Inch  
 ASTM D1784. Standard specification for rigid PVC and CPVC compounds  
 ASTM D2846. Standard specification for PVC and CPVC plastic hot- and cold-water distribution systems

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:

PART NUMBER: