



GAS BALL VALVE - FLARE (OD) x FLARE (OD)



PART #	MODEL #	DESCRIPTION (SIZE)	INNER CARTON QTY.	MASTER CARTON QTY.	SELECT MODEL BELOW
FLARE (OD) x FLARE (OD) GAS BALL VALVES					
H50085	GBV33FF	3/8" x 3/8"	10	100	☐
H50086	GBV22FF	1/2" x 1/2"	10	100	☐
H51033	GBV44FF	5/8" x 5/8"	10	100	☐

SPECIFICATIONS

- 125 PSIG
- 1/2 PSI for Indoor Appliance Connections per ANSI Z21.15 and CSA 9.1
- 5 PSI for Indoor Shutoff per CGA 91-002 and ASME B16.44
- 2 Piece construction
- Lever Handle

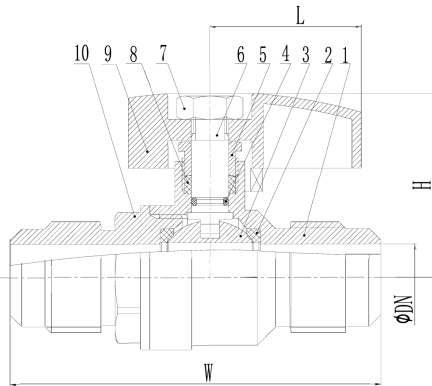

NO.	ITEM	MATERIAL
1	BODY	BRASS
2	SEAT	PTFE
3	BALL	BRASS/CHROME-PLATED
4	O-RING	NBR
5	PACKING NUT	BRASS
6	STEM	BRASS
7	HANDLE NUT	PLATED STEEL
8	PACKING	PTFE
9	HANDLE	AL-ALLOY
10	CAP	BRASS

SIZE	DN	W (REF)	H (REF)	L (REF)	BTU/Hr
3/8" x 3/8"	.277	2.42	1.44	1.28	58,257
1/2" x 1/2"	.394	2.67	1.44	1.28	162,118
5/8" x 5/8"	.504	3.12	1.54	1.28	412,476

JOB NAME:

JOB LOCATION:

CONTRACTOR:

DATE:

ITEM TAG:

ENGINEER APPROVAL:

DATE:

PART NUMBER: